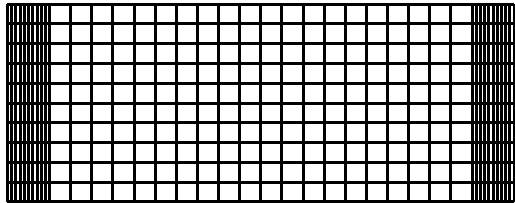
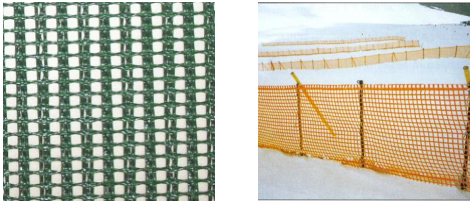


TECHNISCHES DATENBLATT <i>TECHNICAL DATA SHEET</i>		Ausgabe Edition Jan. 10			
Produktname <i>Product trade name</i>	Sympaforce®				
Produkt-Ident <i>Product-ID-No.</i>	SZ 60 / 25 - 3 x 3				
Textiltyp <i>Textile typ</i>	Polymer	MD PET Polyester high tenacity dtex 1100			
Ausrüstung <i>Coating type</i>		CMD PE Polyester high tenacity dtex 1100			
Farbe <i>Colour</i>		PVC PVC			
Schmelzpunkt <i>Melting point</i>	°C	PET 250-260			
Gitteröffnung <i>Aperture size</i>	mm	MD 3 (± 1) CMD 3 (± 1)			
Höchstzugkraft <i>Tensile strength at max load</i>	kN/m	MD 65 (- 5) CMD 30 (- 5)	DIN EN ISO 10319		
Flächengewicht <i>Mass per unit area</i>	g/m²	340 (± 34)	DIN EN ISO 9864		
verstärkte Kante <i>reinforced selvedge</i>					
Rollenmasse <i>Roll dimensions</i>	standard ±10%	Breite <i>width</i>	Länge <i>length</i>	Durchm. <i>diameter</i>	Gewicht <i>weighth</i>
Mindestbestellung <i>Minimum order</i>		2,00 m	50 m	31 cm	42 kg
Anwendung <i>Application</i>	Sicherheitszaun bei Sportveranstaltungen, Schneezaun, Absperrzaun <i>Security fence for sport events, snow fence, barrier fence</i>				
Bilder <i>Pictures</i>					

Standard tolerances and technical developing change reserved